




# Kleštinový upínač úzký pro kleštiny ER

## DIN 6499 (ISO 15488)

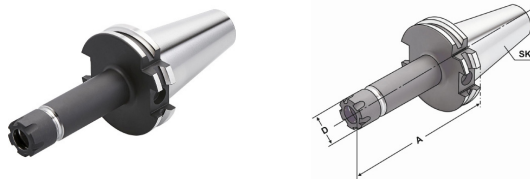

Název	Kužel	Rozsah	D	A			G 2,5 25.000 min <sup>-1</sup>
SK40.55.ERM.11.ADB	SK40	1 – 7 (ER 11)	16	55	AD/B	ER11MK	•
SK40.100.ERM.11.ADB	SK40	1 – 7 (ER 11)	16	100	AD/B	ER11MK	•
SK40.160.ERM.11.ADB	SK40	1 – 7 (ER 11)	16	160	AD/B	ER11MK	•
SK40.55.ERM.16.ADB	SK40	1 – 10 (ER 16)	22	55	AD/B	ER16MK	•
SK40.100.ERM.16.ADB	SK40	1 – 10 (ER 16)	22	100	AD/B	ER16MK	•
SK40.160.ERM.16.ADB	SK40	1 – 10 (ER 16)	22	160	AD/B	ER16MK	•
SK50.100.ERM.16.ADB	SK50	1 – 10 (ER 16)	22	100	AD/B	ER16MK	•
SK50.160.ERM.16.ADB	SK50	1 – 10 (ER 16)	22	160	AD/B	ER16MK	•
SK40.70.ERM.20.ADB	SK40	2 – 13 (ER20)	28	70	AD/B	ER20MK	•
SK40.100.ERM.20.ADB	SK40	2 – 13 (ER20)	28	100	AD/B	ER20MK	•
SK40.160.ERM.20.ADB	SK40	2 – 13 (ER20)	28	160	AD/B	ER20MK	•
SK40.70.ERM.25.ADB	SK40	2 – 16 (ER25)	35	70	AD/B	ER25MK	•
SK40.100.ERM.25.ADB	SK40	2 – 16 (ER25)	35	100	AD/B	ER25MK	•
SK40.160.ERM.25.ADB	SK40	2 – 16 (ER25)	35	160	AD/B	ER25MK	•

dodávka: s vyváženou upínací maticí bez montážního klíče