




Kleštinový upínač pro kleštiny ER

DIN 6499 (ISO 15488)

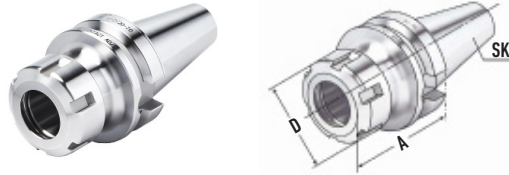

Název	Kužel	Rozsah	D	A			G 2,5 25.000 min ⁻¹
BT30DK.70.ER.16.AD	BT30DK	1 – 10 (ER 16)	32	70	AD	ER16K	•
BT30DK.70.ER.25.AD	BT30DK	2 – 16 (ER 25)	42	70	AD	ER25K	•
BT30DK.70.ER.32.AD	BT30DK	2 – 20 (ER 32)	50	70	AD	ER32K	•
BT30DK.70.ER.40.AD	BT30DK	3 – 26 (ER 40)	63	70	AD	ER40K	•
BT40DK.63.ER.16.ADB	BT40DK	1 – 10 (ER 16)	32	63	AD/B	ER16K	•
BT40DK.60.ER.25.ADB	BT40DK	2 – 16 (ER 25)	42	60	AD/B	ER25K	•
BT40DK.70.ER.32.ADB	BT40DK	2 – 20 (ER 32)	50	70	AD/B	ER32K	•
BT40DK.80.ER.40.ADB	BT40DK	3 – 26 (ER 40)	63	80	AD/B	ER40K	•
BT40DK.100.ER.16.ADB	BT40DK	1 – 10 (ER 16)	32	100	AD/B	ER16K	•
BT40DK.100.ER.25.ADB	BT40DK	2 – 16 (ER 25)	42	100	AD/B	ER25K	•
BT40DK.100.ER.32.ADB	BT40DK	2 – 20 (ER 32)	50	100	AD/B	ER32K	•
BT40DK.100.ER.40.ADB	BT40DK	3 – 26 (ER 40)	63	100	AD/B	ER40K	•
BT40DK.160.ER.16.ADB	BT40DK	1 – 10 (ER 16)	32	160	AD/B	ER16K	•
BT40DK.160.ER.25.ADB	BT40DK	2 – 16 (ER 25)	40	160	AD/B	ER25K	•
BT40DK.160.ER.32.ADB	BT40DK	2 – 20 (ER 32)	50	160	AD/B	ER32K	•
BT40DK.160.ER.40.ADB	BT40DK	3 – 26 (ER 40)	63	160	AD/B	ER40K	•

dodávka: s vyváženou upínací maticí, bez montážního klíče