


Vrták V3100 s vyměnitelnou VBD



HLOUBKA VRTÁNÍ 2xD / s vnitřním chlazením 

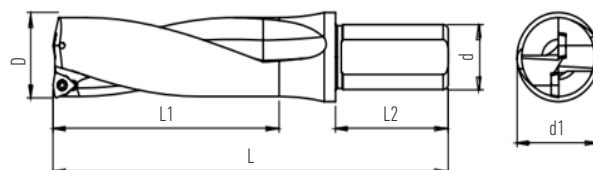

Válcové provedení s ploškou

Objednací číslo	Rozměry (mm)						VBD	Šroubek	Klíč
	D	d	d1	L	L1	L2			
V3100.16.V25.D2	16	25	34	110	32	54	WPMT 033208 (1,2 Nm)	TMSV-M2,5x6	T08
V3100.16,5.V25.D2	16,5	25	34	112	33	56			
V3100.17.V25.D2	17	25	34	112	34	56			
V3100.17,5.V25.D2	17,5	25	34	114	35	56			
V3100.18.V25.D2	18	25	34	114	36	56			
V3100.18,5.V25.D2	18,5	25	34	116	37	56			
V3100.19.V25.D2	19	25	34	116	38	56			
V3100.19,5.V25.D2	19,5	25	34	119	39	56			
V3100.20.V25.D2	20	25	34	119	40	56			
V3100.20,5.V25.D2	20,5	25	34	122	41	56			
V3100.21.V25.D2	21	25	34	122	42	56			
V3100.21,5.V25.D2	21,5	25	34	125	43	56			
V3100.22.V25.D2	22	25	34	125	44	56			
V3100.22,5.V25.D2	22,5	25	34	128	45	56			
V3100.23.V25.D2	23	25	34	128	46	56			
V3100.23,5.V25.D2	23,5	25	34	129	47	56			
V3100.24.V25.D2	24	25	34	129	48	56	WPMT 053308 (1,9 Nm)	TMSV-M3x8	T10
V3100.24,5.V25.D2	24,5	25	34	131	49	56			
V3100.25.V25.D2	25	25	34	131	50	56			
V3100.25,5.V25.D2	25,5	25	34	134	51	56			
V3100.26.V25.D2	26	25	34	134	52	56			
V3100.26,5.V25.D2	26,5	25	34	137	53	56			
V3100.27.V25.D2	27	25	34	137	54	56			
V3100.27,5.V25.D2	27,5	25	34	140	55	56			
V3100.28.V25.D2	28	25	34	140	56	56			
V3100.28,5.V25.D2	28,5	25	34	140	57	56			
V3100.29.V25.D2	29	25	34	143	58	56			
V3100.29,5.V25.D2	29,5	25	34	143	59	56			
V3100.30.V32.D2	30	32	44	150	60	60			
V3100.31.V32.D2	31	32	44	153	62	60			
V3100.32.V32.D2	32	32	44	156	64	60			
V3100.33.V32.D2	33	32	44	159	66	60			
V3100.34.V32.D2	34	32	44	162	68	60			
V3100.35.V32.D2	35	32	44	165	70	60	WPMT 063308 (4,3 Nm)	TMSV-M4x11	T15
V3100.36.V32.D2	36	32	44	168	72	60			
V3100.37.V32.D2	37	32	44	171	74	60			
V3100.38.V32.D2	38	32	44	174	76	60			
V3100.39.V32.D2	39	32	44	177	78	60			
V3100.40.V32.D2	40	32	44	180	80	60			
V3100.41.V32.D2	41	32	44	183	82	60			
V3100.42.V32.D2	42	32	44	186	84	60			
V3100.43.V32.D2	43	32	44	189	86	60			
V3100.44.V32.D2	44	32	44	192	88	60			
V3100.45.V40.D2	45	40	54	195	90	70			
V3100.46.V40.D2	46	40	54	198	92	70			
V3100.47.V40.D2	47	40	54	201	94	70			
V3100.48.V40.D2	48	40	54	204	96	70			
V3100.49.V40.D2	49	40	54	207	98	70			
V3100.50.V40.D2	50	40	54	210	100	70			

* Tolerance vrtaného otvoru + - 0,2 mm

Vrtáky V3100 s vyměnitelnými VBD



HLOUBKA VRTÁNÍ 2xD/3xD/4xD/5xD

Doporučené řezné podmínky

ISO	Materiál	Tvrdość HB	Vc (m/min)	Posuv (mm/ot.)				
				WPMT03	WPMT04	WPMT05	WPMT06	WPMT08
				D15,5 - D21,5	D22 - D25,5	D26 - D30	D31 - D39	D40 - D50
P	Nelegovaná ocel, žíhaná	< 180 HB	110 - 220	0,06 - 0,09	0,06 - 0,11	0,07 - 0,13	0,08 - 0,18	0,10 - 0,25
	Nízkolegovaná ocel, žíhaná	180 - 280 HB	90 - 140	0,06 - 0,09	0,06 - 0,11	0,07 - 0,13	0,08 - 0,18	0,10 - 0,25
	Vysoce legovaná a nástr., žíhaná	280 - 350 HB	70 - 120	0,05 - 0,07	0,05 - 0,09	0,06 - 0,11	0,07 - 0,14	0,08 - 0,17
M	Nerezové oceli	< 200 HB	60 - 140	0,05 - 0,09	0,05 - 0,10	0,06 - 0,13	0,07 - 0,15	0,08 - 0,18
K	Šedá litina < 1000 N/mm ²	< 350 Mpa	100 - 160	0,07 - 0,11	0,07 - 0,13	0,08 - 0,15	0,09 - 0,18	0,11 - 0,22
	Tvárná litina	< 450 Mpa	90 - 120	0,06 - 0,10	0,06 - 0,12	0,07 - 0,14	0,08 - 0,16	0,10 - 0,20
S	Vysoce legované oceli	-	25 - 50	0,03 - 0,05	0,03 - 0,06	0,04 - 0,08	0,05 - 0,10	0,06 - 0,12
H	Superslitiny	-	25 - 50	0,03 - 0,05	0,03 - 0,06	0,04 - 0,08	0,05 - 0,10	0,06 - 0,12

* Tabulka podmínek je určena pro 2xD a 3xD tělesa

Pro 4xD těleso snížit řezné podmínky o 10%

Pro 5xD těleso snížit řezné podmínky o 15%

Katalogové číslo	P	M	K	S	H
WPMT033208-M PKU35	●	●	●	○	○
WPMT033208-M PKS38	●	●	●	●	●
WPMT033208-M PKT38	●	●	●	●	●
WPMT033208-M PKS48	●	●	●	●	

Katalogové číslo	P	M	K	S	H
WPMT053308-M PKU35	●	●	●	○	○
WPMT053308-M PKS38	●	●	●	●	●
WPMT053308-M PKT38	●	●	●	●	●
WPMT053308-M PKS48	●	●	●	●	
WPMT053308-S PKU35	●	●	●	○	○
WPMT053308-S PKS38	●	●	●	●	●
WPMT053308-S PKT38	●	●	●	●	
WPMT053308-S PKS48	●	●	●	●	

Katalogové číslo	P	M	K	S	H
WPMT083412-M PKU35	●	●	●	○	○
WPMT083412-M PKS38	●	●	●	●	●
WPMT083412-M PKT38	●	●	●	●	●
WPMT083412-M PKS48	●	●	●	●	
WPMT083412-S PKU35	●	●	●	○	○
WPMT083412-S PKS38	●	●	●	●	●
WPMT083412-S PTS38	●	●	●	●	●
WPMT083412-S PKS48	●	●	●	●	


● = 1.volba doporučené ○ = 2.volba vhodné

Katalogové číslo	P	M	K	S	H
WPMT043208-M PKU35	●	●	●	○	○
WPMT043208-M PKS38	●	●	●	●	●
WPMT043208-M PKT38	●	●	●	●	●
WPMT043208-M PKS48	●	●	●	●	
WPMT043208-S PKU35	●	●	●	○	○
WPMT043208-S PKS38	●	●	●	●	●
WPMT043208-S PKT38	●	●	●	●	●
WPMT043208-S PKS48	●	●	●	●	

Katalogové číslo	P	M	K	S	H
WPMT063308-M PKU35	●	●	●	○	○
WPMT063308-M PKS38	●	●	●	●	●
WPMT063308-M PKT38	●	●	●	●	●
WPMT063308-M PKS48	●	●	●	●	
WPMT063308-S PKU35	●	●	●	○	○
WPMT063308-S PKS38	●	●	●	●	●
WPMT063308-S PKT38	●	●	●	●	●
WPMT063308-S PKS48	●	●	●	●	

Rozměry (mm)

VBD	A	B	S	r	d1
WPMT 033208	3,8	5,56	2,38	0,8	2,8
WPMT 043208	4,3	6,35	2,38	0,8	3
WPMT 053308	5,4	7,94	3,18	0,8	3,4
WPMT 063308	6,5	9,53	3,97	0,8	4
WPMT 083412	8,7	12,7	4,76	1,2	4,3



Tvar břítu



ostrá geometrie, lehká tvorba třísky

Tvar břítu



nízké řezné síly během obrábění