


Silový kleštinový upínač




DIN 6499 (ISO 15488)
pro upínací stopky DIN 1835 A+B+E a DIN 6535 HA+HB+HE

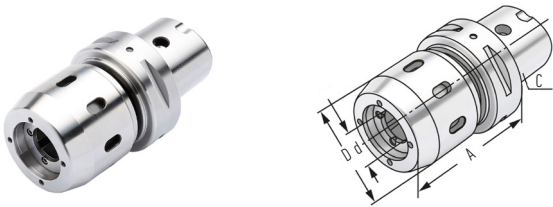

Název	Kužel	Rozsah	D	d	A		G 6,3 15.000 min ⁻¹
C5.75.S.20	C5	3 - 20 (RS 20)	56	20	75	RS20K	•
C5.90.S.32	C5	3 - 32 (RS 32)	71	32	90	RS32K	•
C6.75.S.20	C6	3 - 20 (RS 20)	56	20	75	RS20K	•
C6.85.S.32	C6	3 - 32 (RS 32)	71	32	85	RS32K	•

dodávka: s vyváženou upínací maticí, bez montážního klíče

Klíče pro silové upínače

		D
		RS20K 50
		RS32K (pro velikost 25 a 32) 60