


Redukční pouzdro BT/PSC



redukce z BT (ISO 7388-2) (JIS B 6339 MAS-BT) na Capto (ISO 26623-1)

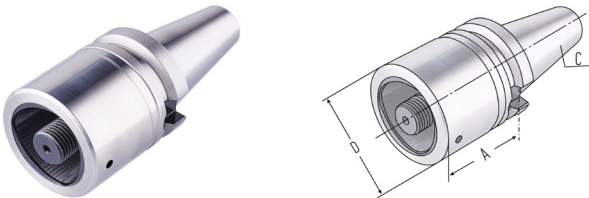

Název	Kužel	Typ	D	A	Doporučený utahovací moment Nm	G 6,3 15.000 min ⁻¹
BT40.30.R.C3	BT40	C3	32	30	45	•
BT40.30.R.C4	BT40	C4	40	30	55	•
BT40.30.R.C5	BT40	C5	50	30	95	•
BT40.75.R.C6	BT40	C6	63	75	170	•
BT50.40.R.C3	BT50	C3	32	40	45	•
BT50.40.R.C4	BT50	C4	40	40	55	•
BT50.40.R.C5	BT50	C5	50	40	95	•
BT50.100.R.C6	BT50	C6	63	100	170	•