


Redukční pouzdro/prodloužení - PSC/PSC



redukce z Capto (ISO 26623-1) na Capto (ISO 26623-1)

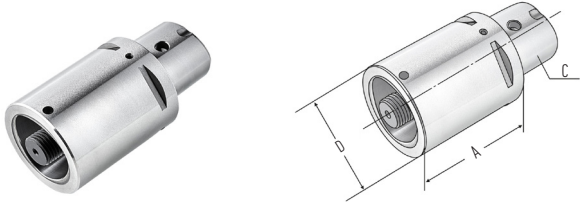

Název	Kužel	Typ	D	A	Doporučený utahovací moment Nm	G 6,3 15.000 min ⁻¹
C4.60.R.C4	C4	C4	40	60	50	•
C5.80.R.C5	C5	C5	50	80	50	•
C6.70.R.C3	C6	C3	32	70	50	•
C6.80.R.C4	C6	C4	40	80	50	•
C6.80.R.C5	C6	C5	50	80	50	•
C6.80.R.C6	C6	C6	63	80	70	•
C6.100.R.C6	C6	C6	63	100	70	•
C6.140.R.C6	C6	C6	63	140	70	•
C6.200.R.C6	C6	C6	63	200	70	•