


Upínač pro nástrčné frézy

DIN 6357

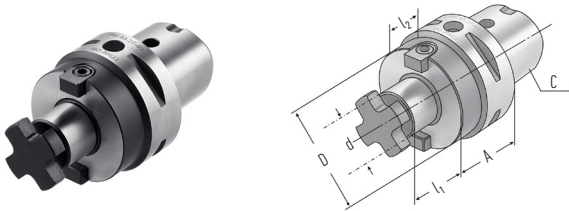

Název	Kužel	d	D	A	l ₁	l ₂	G 2,5 25.000 min ⁻¹
C3.30.N.16	C3	16	38	30	17	15	•
C4.35.N.16	C4	16	38	35	17	15	•
C4.40.N.22	C4	22	48	40	19	20	•
C5.35.N.16	C5	16	38	35	17	15	•
C5.40.N.22	C5	22	48	40	19	20	•
C5.40.N.27	C5	27	58	40	21	20	•
C5.40.N.32	C5	32	78	40	24	20	•
C6.35.N.16	C6	16	38	35	17	13	•
C6.40.N.22	C6	22	48	40	19	18	•
C6.40.N.27	C6	27	58	40	21	18	•
C6.40.N.32	C6	32	78	40	24	18	•
C6.45.N.40	C6	40	88	45	27	23	•
C6.100.N.16	C6	16	38	100	17	78	•

d = 40/d = 60: pro velké průměry fréz se čtyřmi závitovými otvory dle DIN 2079
dodávka: s upínacím šroubem s křížovou hlavou a s upínacím šroubem s válcovou hlavou dle DIN 912 pro frézy s vnitřním chlazením