



Upínač Whistle Notch pro upínací stopky

Upínač Whistle Notch DIN 6359 pro upínací stopky DIN 1835-E

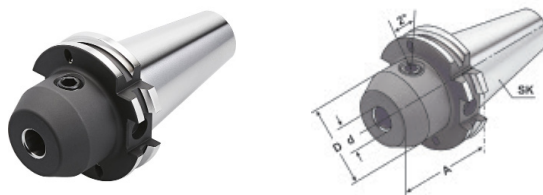

| Název | Kužel | d | D | A |  | G 2,5 25.000 min ⁻¹ |
|--------------------|-------|----|----|-----|-------------------------------------------------------------------------------------|-----------------------------------|
| SK40.50.WN.06.ADB | SK40 | 6 | 25 | 50 | AD/B | • |
| SK40.50.WN.08.ADB | SK40 | 8 | 28 | 50 | AD/B | • |
| SK40.50.WN.10.ADB | SK40 | 10 | 35 | 50 | AD/B | • |
| SK40.50.WN.12.ADB | SK40 | 12 | 42 | 50 | AD/B | • |
| SK40.50.WN.14.ADB | SK40 | 14 | 44 | 50 | AD/B | • |
| SK40.63.WN.16.ADB | SK40 | 16 | 48 | 63 | AD/B | • |
| SK40.63.WN.18.ADB | SK40 | 18 | 50 | 63 | AD/B | • |
| SK40.63.WN.20.ADB | SK40 | 20 | 52 | 63 | AD/B | • |
| SK40.100.WN.25.ADB | SK40 | 25 | 65 | 100 | AD/B | • |
| SK40.100.WN.32.ADB | SK40 | 32 | 72 | 100 | AD/B | • |
| SK40.120.WN.40.ADB | SK40 | 40 | 80 | 120 | AD/B | • |
| SK50.63.WN.06.ADB | SK50 | 6 | 25 | 63 | AD/B | • |
| SK50.63.WN.08.ADB | SK50 | 8 | 28 | 63 | AD/B | • |
| SK50.63.WN.10.ADB | SK50 | 10 | 35 | 63 | AD/B | • |
| SK50.63.WN.12.ADB | SK50 | 12 | 42 | 63 | AD/B | • |
| SK50.63.WN.14.ADB | SK50 | 14 | 44 | 63 | AD/B | • |
| SK50.63.WN.16.ADB | SK50 | 16 | 48 | 63 | AD/B | • |
| SK50.63.WN.18.ADB | SK50 | 18 | 50 | 63 | AD/B | • |
| SK50.63.WN.20.ADB | SK50 | 20 | 52 | 63 | AD/B | • |
| SK50.80.WN.25.ADB | SK50 | 25 | 65 | 80 | AD/B | • |
| SK50.100.WN.32.ADB | SK50 | 32 | 72 | 100 | AD/B | • |
| SK50.100.WN.40.ADB | SK50 | 40 | 80 | 100 | AD/B | • |

od průměr d = 25 se dvěma upínacími šrouby